- 10-32 output ports
- 3 Porting configurations
- Convenient junction point
- Multiple branches
- One input

Inline Manifolds

Port Options

Input
- 1/8 NPT (F)

Output
- 10-32 UNF(F)

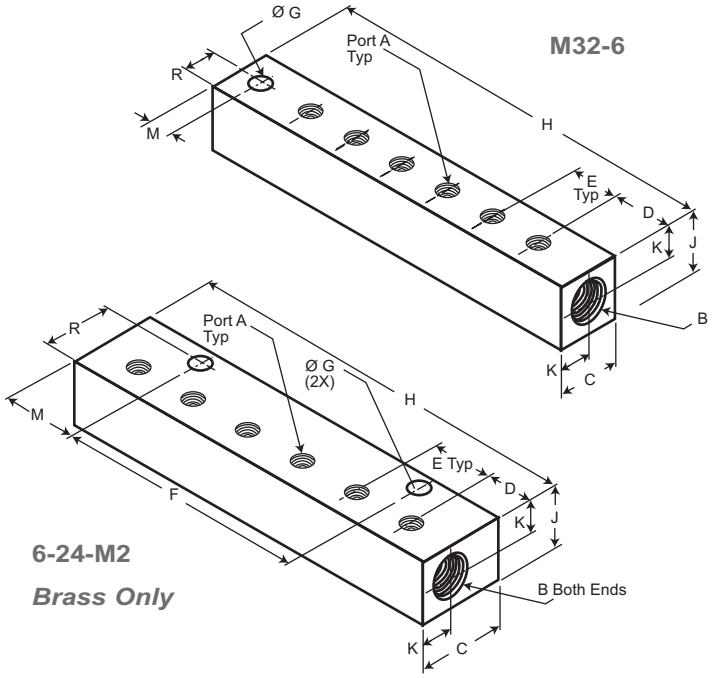

Port Configuration

Cross Section

Part Number

M32-*



MS32-*



MT32-*

Product Information

1/8 NPT (F) Input x 10-32 (F) Output

Part Number	No. of Stations	A	NPT B	C	D	E	F	G	H	J	K	M	R
6-24-M2	6	10-32	1/8	.88	.44	.63	2.50	.20	4.00	.63	.32	.75	.72
Porting on one side													
M32-4	4	10-32	1/8	.625	.75	.50	-	.22	3.00	.62	.31	.25	.31
M32-6	6	10-32	1/8	.625	.75	.50	-	.22	4.00	.62	.31	.25	.31
M32-8	8	10-32	1/8	.625	.75	.50	-	.22	5.00	.62	.31	.25	.31
M32-10	10	10-32	1/8	.625	.75	.50	-	.22	6.00	.62	.31	.25	.31
Porting on two sides													
MS32-4	8	10-32	1/8	.625	.75	.50	-	.22	3.00	.62	.31	.25	.31
MS32-6	12	10-32	1/8	.625	.75	.50	-	.22	4.00	.62	.31	.25	.31
MS32-8	16	10-32	1/8	.625	.75	.50	-	.22	5.00	.62	.31	.25	.31
MS32-10	20	10-32	1/8	.625	.75	.50	-	.22	6.00	.62	.31	.25	.31
Porting on three sides													
MT32-4	12	10-32	1/8	.625	.75	.50	-	.22	3.00	.62	.31	.25	.31
MT32-6	18	10-32	1/8	.625	.75	.50	-	.22	4.00	.62	.31	.25	.31
MT32-8	24	10-32	1/8	.625	.75	.50	-	.22	5.00	.62	.31	.25	.31
MT32-10	30	10-32	1/8	.625	.75	.50	-	.22	6.00	.62	.31	.25	.31

All measurements are given in inches unless otherwise specified.

- When design makes a dimension critical- contact factory for confirmation. All dimensions shown subject to change without notice.

Inline Manifolds

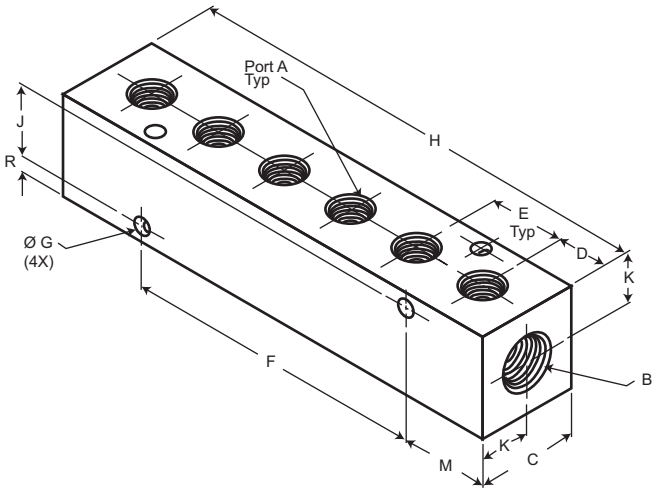

Port Options

Input
- 1/4 NPT (F)
- 3/8 NPT (F)

Output
- 1/8 NPT (F)

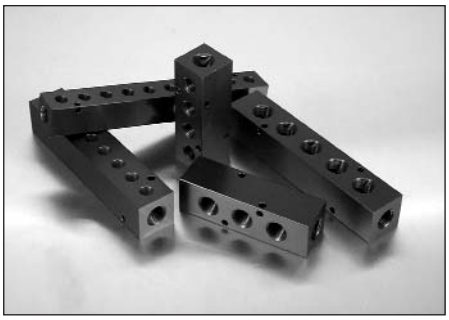

- Convenient junction point
- Multiple branches
- Two input ports
- Aluminum with black anodizing for corrosion resistance and appearance
- Mounting versatility

Push-to-Connect fittings (sold separately) simplify tube installation

Product Information

1/4 NPT (F) Input x 1/8 NPT (F) Output

Part Number	No. of Stations	NPT A	B	C	D	E	F	G	H	J	K	M	R
M10-125-2	2	1/8	1/4	1.00	.50	.75	N/A	.17	1.75	.70	.50	.88	.15
M10-125-3	3	1/8	1/4	1.00	.50	.75	.75	.17	2.50	.70	.50	.88	.15
M10-125-4	4	1/8	1/4	1.00	.50	.75	1.50	.17	3.25	.70	.50	.88	.15
M10-125-5	5	1/8	1/4	1.00	.50	.75	2.25	.17	4.00	.70	.50	.88	.15
M10-125-6	6	1/8	1/4	1.00	.50	.75	3.00	.17	4.75	.70	.50	.88	.15
M10-125-7	7	1/8	1/4	1.00	.50	.75	3.75	.17	5.50	.70	.50	.88	.15
M10-125-8	8	1/8	1/4	1.00	.50	.75	4.50	.17	6.25	.70	.50	.88	.15
M10-125-9	9	1/8	1/4	1.00	.50	.75	5.25	.17	7.00	.70	.50	.88	.15
M10-125-10	10	1/8	1/4	1.00	.50	.75	6.00	.17	7.75	.70	.50	.88	.15

3/8 NPT (F) Input x 1/8 NPT (F) Output

Part Number	No. of Stations	NPT A	B	C	D	E	F	G	H	J	K	M	R
M20-125-2	2	1/8	3/8	1.25	.50	.75	3.00	.20	1.75	.89	.63	.88	.18
M20-125-3	3	1/8	3/8	1.25	.50	.75	3.00	.20	2.50	.89	.63	.88	.18
M20-125-4	4	1/8	3/8	1.25	.50	.75	1.50	.20	3.25	.89	.63	.88	.18
M20-125-5	5	1/8	3/8	1.25	.50	.75	3.00	.20	4.00	.89	.63	.88	.18
M20-125-6	6	1/8	3/8	1.25	.50	.75	3.00	.20	4.75	.89	.63	.88	.18
M20-125-7	7	1/8	3/8	1.25	.50	.75	3.00	.20	5.50	.89	.63	.88	.18
M20-125-8	8	1/8	3/8	1.25	.50	.75	4.50	.20	6.25	.89	.63	.88	.18
M20-125-9	9	1/8	3/8	1.25	.50	.75	3.00	.20	7.00	.89	.63	.88	.18
M20-125-10	10	1/8	3/8	1.25	.50	.75	6.00	.20	7.75	.89	.63	.88	.18

- Measurements in inches

- When design makes a dimension critical- contact factory for confirmation. All dimensions shown subject to change without notice.

Pneumadyne offers a wide selection of pneumatic components ideal for use on our multiple connection manifolds

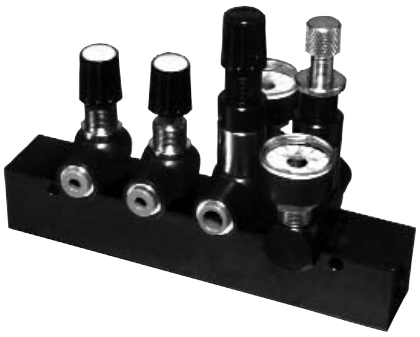

System 11 is a unique valve consolidation method using custom manifolds that house components for use only on System 11 manifolds

(Click for additional information)

Inline Manifolds

Port Options

Input
- 3/8 NPT (F)

Output
- 1/4 NPT (F)
- 3/8 NPT (F)

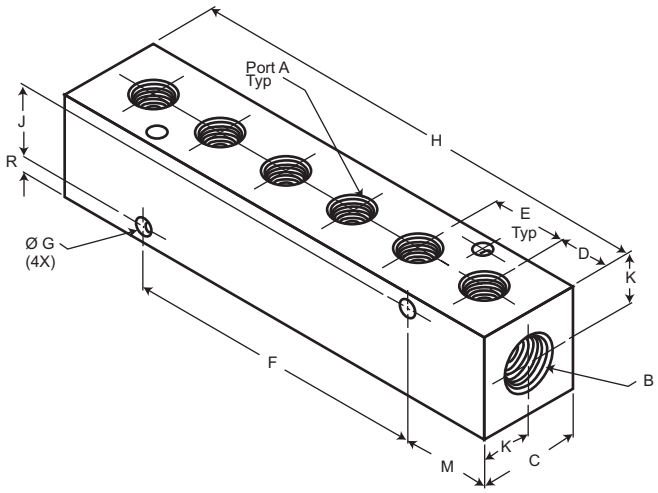

Product Information

3/8 NPT (F) Input x 1/4 NPT (F) Output

Part Number	*	NPT A	B	C	D	E	F	G	H	J	K	M	R
M20-250-2	2	1/4	3/8	1.25	.63	.88	N/A	.20	2.13	.89	.63	1.06	.18
M20-250-3	3	1/4	3/8	1.25	.63	.88	.88	.20	3.00	.89	.63	1.06	.18
M20-250-4	4	1/4	3/8	1.25	.63	.88	1.75	.20	3.88	.89	.63	1.06	.18
M20-250-5	5	1/4	3/8	1.25	.63	.88	2.63	.20	4.75	.89	.63	1.06	.18
M20-250-6	6	1/4	3/8	1.25	.63	.88	3.50	.20	5.63	.89	.63	1.06	.18
M20-250-7	7	1/4	3/8	1.25	.63	.88	4.38	.20	6.50	.89	.63	1.06	.18
M20-250-8	8	1/4	3/8	1.25	.63	.88	5.25	.20	7.38	.89	.63	1.06	.18
M20-250-9	9	1/4	3/8	1.25	.63	.88	6.13	.20	8.25	.89	.63	1.06	.18
M20-250-10	10	1/4	3/8	1.25	.63	.88	7.00	.20	9.13	.89	.63	1.06	.18

3/8 NPT (F) Input x 3/8 NPT (F) Output

Part Number	*	NPT A	B	C	D	E	F	G	H	J	K	M	R
M20-375-2	2	3/8	3/8	1.25	1.00	1.13	N/A	.20	3.13	.89	.63	1.56	.18
M20-375-3	3	3/8	3/8	1.25	1.00	1.13	1.13	.20	4.25	.89	.63	1.56	.18
M20-375-4	4	3/8	3/8	1.25	1.00	1.13	2.25	.20	5.38	.89	.63	1.56	.18
M20-375-5	5	3/8	3/8	1.25	1.00	1.13	3.38	.20	6.50	.89	.63	1.56	.18
M20-375-6	6	3/8	3/8	1.25	1.00	1.13	4.50	.20	7.63	.89	.63	1.56	.18
M20-375-7	7	3/8	3/8	1.25	1.00	1.13	5.63	.20	8.75	.89	.63	1.56	.18
M20-375-8	8	3/8	3/8	1.25	1.00	1.13	6.75	.20	9.88	.89	.63	1.56	.18
M20-375-9	9	3/8	3/8	1.25	1.00	1.13	7.88	.20	11.00	.89	.63	1.56	.18
M20-375-10	10	3/8	3/8	1.25	1.00	1.13	9.00	.20	12.13	.89	.63	1.56	.18

* Number of stations

- Measurements in inches

- When design makes a dimension critical- contact factory for confirmation. All dimensions shown subject to change without notice.

Inline Manifolds

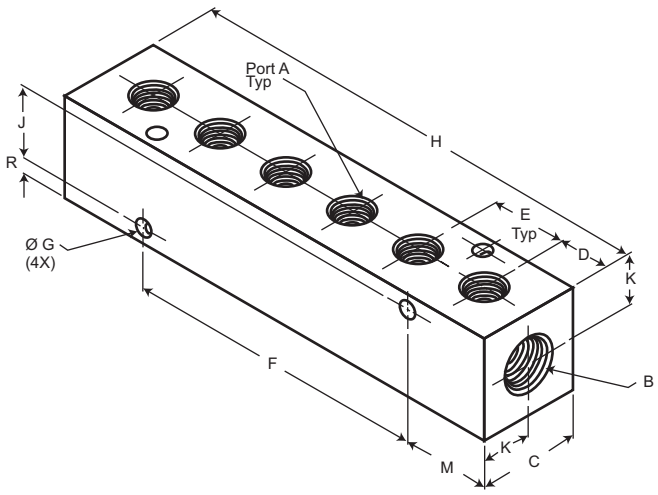

Port Options

Input
- 1/2 NPT (F)

Output
- 1/4 NPT (F)
- 3/8 NPT (F)

Product Information

1/2 NPT (F) Input x 1/4 NPT (F) Output

Part Number	*	NPT A	B	C	D	E	F	G	H	J	K	M	R
M30-250-2	2	1/4	1/2	1.50	.88	1.00	N/A	.20	2.75	1.12	.75	1.38	.19
M30-250-3	3	1/4	1/2	1.50	.88	1.00	1.00	.20	3.75	1.12	.75	1.38	.19
M30-250-4	4	1/4	1/2	1.50	.88	1.00	2.00	.20	4.75	1.12	.75	1.38	.19
M30-250-5	5	1/4	1/2	1.50	.88	1.00	3.00	.20	5.75	1.12	.75	1.38	.19
M30-250-6	6	1/4	1/2	1.50	.88	1.00	4.00	.20	6.75	1.12	.75	1.38	.19
M30-250-7	7	1/4	1/2	1.50	.88	1.00	5.00	.20	7.75	1.12	.75	1.38	.19
M30-250-8	8	1/4	1/2	1.50	.88	1.00	6.00	.20	8.75	1.12	.75	1.38	.19
M30-250-9	9	1/4	1/2	1.50	.88	1.00	7.00	.20	9.75	1.12	.75	1.38	.19
M30-250-10	10	1/4	1/2	1.50	.88	1.00	8.00	.20	10.75	1.12	.75	1.38	.19

1/2 NPT (F) Input x 3/8 NPT (F) Output

Part Number	*	NPT A	B	C	D	E	F	G	H	J	K	M	R
M30-375-2	2	3/8	1/2	1.50	.88	1.00	N/A	.20	2.75	1.12	.75	1.38	.19
M30-375-3	3	3/8	1/2	1.50	.88	1.00	1.00	.20	3.75	1.12	.75	1.38	.19
M30-375-4	4	3/8	1/2	1.50	.88	1.00	2.00	.20	4.75	1.12	.75	1.38	.19
M30-375-5	5	3/8	1/2	1.50	.88	1.00	3.00	.20	5.75	1.12	.75	1.38	.19
M30-375-6	6	3/8	1/2	1.50	.88	1.00	4.00	.20	6.75	1.12	.75	1.38	.19
M30-375-7	7	3/8	1/2	1.50	.88	1.00	5.00	.20	7.75	1.12	.75	1.38	.19
M30-375-8	8	3/8	1/2	1.50	.88	1.00	6.00	.20	8.75	1.12	.75	1.38	.19
M30-375-9	9	3/8	1/2	1.50	.88	1.00	7.00	.20	9.75	1.12	.75	1.38	.19
M30-375-10	10	3/8	1/2	1.50	.88	1.00	8.00	.20	10.75	1.12	.75	1.38	.19

* Number of stations

- Measurements in inches

Bookmark
pneumadyne.com
for
standard and new product information and useful links

- Download 3D CAD drawings
- View detailed product information
- See 'What's New'
- Review industry related solutions
- Request technical support

Pneumadyne has been an innovator in the design and manufacture of manifolds since 1976

- When design makes a dimension critical- contact factory for confirmation. All dimensions shown subject to change without notice.

Stainless steel manifolds are ideal for use in highly corrosive environments

Inline Manifolds

Port Options

Input
- 3/4 NPT (F)

Output
- 1/4 NPT (F)
- 3/8 NPT (F)

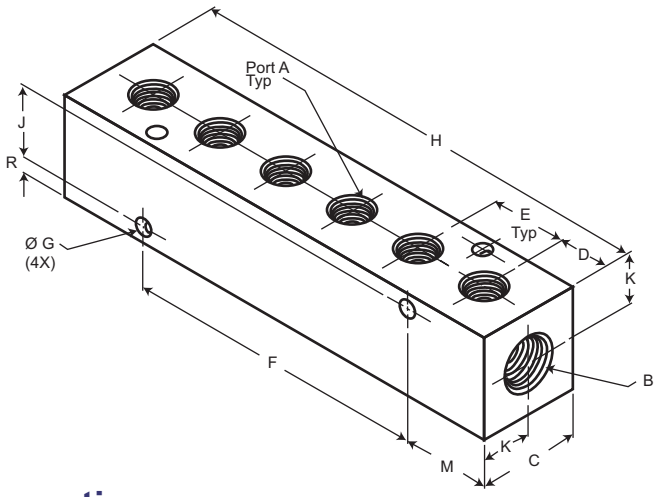

Product Information

3/4 NPT (F) Input x 1/4 NPT (F) Output

Part Number	*	NPT A	NPT B	C	D	E	F	G	H	J	K	M	R
M35-250-2	2	1/4	3/4	1.50	1.75	0.88	1.88	.20	4.38	1.14	.75	1.25	.18
M35-250-3	3	1/4	3/4	1.50	1.75	0.88	2.75	.20	5.25	1.14	.75	1.25	.18
M35-250-4	4	1/4	3/4	1.50	1.75	0.88	3.63	.20	6.13	1.14	.75	1.25	.18
M35-250-5	5	1/4	3/4	1.50	1.75	0.88	4.50	.20	7.00	1.14	.75	1.25	.18
M35-250-6	6	1/4	3/4	1.50	1.75	0.88	5.38	.20	7.88	1.14	.75	1.25	.18
M35-250-7	7	1/4	3/4	1.50	1.75	0.88	6.25	.20	8.75	1.14	.75	1.25	.18
M35-250-8	8	1/4	3/4	1.50	1.75	0.88	7.13	.20	9.63	1.14	.75	1.25	.18
M35-250-9	9	1/4	3/4	1.50	1.75	0.88	8.00	.20	10.50	1.14	.75	1.25	.18
M35-250-10	10	1/4	3/4	1.50	1.75	0.88	8.88	.20	11.38	1.14	.75	1.25	.18

3/4 NPT (F) Input x 3/8 NPT (F) Output

Part Number	*	NPT A	NPT B	C	D	E	F	G	H	J	K	M	R
M35-375-2	2	3/8	3/4	1.50	1.75	1.13	2.13	.20	4.63	1.14	.75	1.25	.18
M35-375-3	3	3/8	3/4	1.50	1.75	1.13	3.25	.20	5.75	1.14	.75	1.25	.18
M35-375-4	4	3/8	3/4	1.50	1.75	1.13	4.38	.20	6.88	1.14	.75	1.25	.18
M35-375-5	5	3/8	3/4	1.50	1.75	1.13	5.50	.20	8.00	1.14	.75	1.25	.18
M35-375-6	6	3/8	3/4	1.50	1.75	1.13	6.63	.20	9.13	1.14	.75	1.25	.18
M35-375-7	7	3/8	3/4	1.50	1.75	1.13	7.75	.20	10.25	1.14	.75	1.25	.18
M35-375-8	8	3/8	3/4	1.50	1.75	1.13	8.88	.20	11.38	1.14	.75	1.25	.18
M35-375-9	9	3/8	3/4	1.50	1.75	1.13	10.00	.20	12.50	1.14	.75	1.25	.18
M35-375-10	10	3/8	3/4	1.50	1.75	0.88	11.13	.20	13.63	1.14	.75	1.25	.18

* Number of stations

- Measurements in inches

- When design makes a dimension critical- contact factory for confirmation. All dimensions shown subject to change without notice.

Inline Manifolds-New Materials

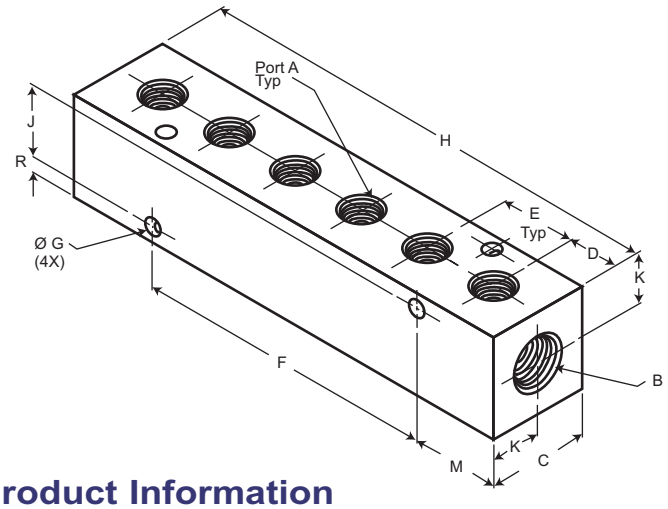

Port Options

Input
- 1/4 NPT (F)
- 3/8 NPT (F)

Output
- 1/8 NPT (F)
- 1/4 NPT (F)

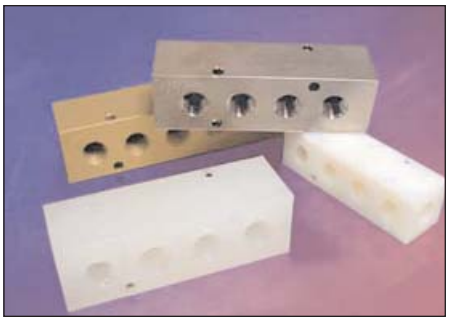

- 2 to 10 stations
- Two input ports
- Convenient junction point
- Variety of port sizes

Product Information

1/4 NPT (F) Input x 1/8 NPT (F) Output

Part Number	No. of Stations	NPT A	NPT B	C	D	E	F	G	H	J	K	M	R
M10-125-2-*	2	1/8	1/4	1.00	.50	.75	N/A	.17	1.75	.70	.50	.88	.15
M10-125-3-*	3	1/8	1/4	1.00	.50	.75	.75	.17	2.50	.70	.50	.88	.15
M10-125-4-*	4	1/8	1/4	1.00	.50	.75	1.50	.17	3.25	.70	.50	.88	.15
M10-125-5-*	5	1/8	1/4	1.00	.50	.75	2.25	.17	4.00	.70	.50	.88	.15
M10-125-6-*	6	1/8	1/4	1.00	.50	.75	3.00	.17	4.75	.70	.50	.88	.15
M10-125-7-*	7	1/8	1/4	1.00	.50	.75	3.75	.17	5.50	.70	.50	.88	.15
M10-125-8-*	8	1/8	1/4	1.00	.50	.75	4.50	.17	6.25	.70	.50	.88	.15
M10-125-9-*	9	1/8	1/4	1.00	.50	.75	5.25	.17	7.00	.70	.50	.88	.15
M10-125-10-*	10	1/8	1/4	1.00	.50	.75	6.00	.17	7.75	.70	.50	.88	.15

3/8 NPT (F) Input x 1/4 NPT (F) Output

Part Number	*	NPT A	NPT B	C	D	E	F	G	H	J	K	M	R
M20-250-2-*	2	1/4	3/8	1.25	.63	.88	N/A	.20	2.13	.89	.63	1.06	.18
M20-250-3-*	3	1/4	3/8	1.25	.63	.88	.88	.20	3.00	.89	.63	1.06	.18
M20-250-4-*	4	1/4	3/8	1.25	.63	.88	1.75	.20	3.88	.89	.63	1.06	.18
M20-250-5-*	5	1/4	3/8	1.25	.63	.88	2.63	.20	4.75	.89	.63	1.06	.18
M20-250-6-*	6	1/4	3/8	1.25	.63	.88	3.50	.20	5.63	.89	.63	1.06	.18
M20-250-7-*	7	1/4	3/8	1.25	.63	.88	4.38	.20	6.50	.89	.63	1.06	.18
M20-250-8-*	8	1/4	3/8	1.25	.63	.88	5.25	.20	7.38	.89	.63	1.06	.18
M20-250-9-*	9	1/4	3/8	1.25	.63	.88	6.13	.20	8.25	.89	.63	1.06	.18
M20-250-10-*	10	1/4	3/8	1.25	.63	.88	7.00	.20	9.13	.89	.63	1.06	.18

* Number of stations

- Measurements in inches
- When design makes a dimension critical- contact factory for confirmation. All dimensions shown subject to change without notice.

New Manifold Material

Pneumadyne's Inline Manifolds are now available in 303 Stainless Steel, Brass, Polypropylene and Nylon. The Brass and Stainless Steel manifolds are extremely durable and offered for use with air, water and hydraulic oils. Stainless Steel is also ideal for highly corrosive environments. Choose Polypropylene or Nylon when using air, water or other compatible media in lower pressure applications.

Two to 10 station manifolds are available with 1/4 or 3/8 NPT (F) input ports and 1/8 or 1/4 NPT (F) output ports. Simply thread fittings into the ports to produce an organized method of supplying multiple lines from a single source.

Ordering Information

- To order New Material Manifolds replace the "*" in the Product Information listing with the desired material abbreviation.

SS= 303 Stainless Steel

BRS= Brass

NYN= Nylon

PPN= Polypropylene

- Output port spacing is 1.5" center-to-center
- 2 to 10 stations
- Mounting versatility

Inline Manifolds- 1.5" Spacing

Port Options

Input
- 1/4 NPT (F)
- 3/8 NPT (F)
- 1/2 NPT (F)

Output
- 1/8 NPT (F)
- 1/4 NPT (F)
- 3/8 NPT (F)

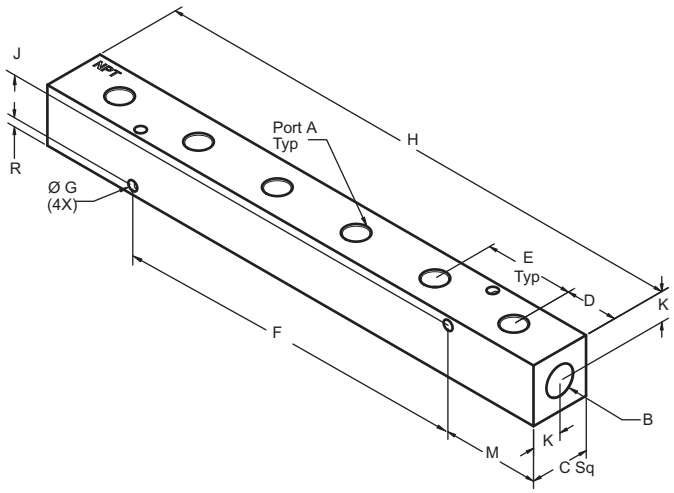

Product Information

1/4 NPT (F) Input x 1/8 NPT (F) Output

Part Number	*	NPT A	B	C	D	E	F	G	H	J	K	M	R
M10-125-2W	2	1/8	1/4	1.00	.88	1.50	N/A	.17	3.25	.70	.50	1.63	.15
M10-125-3W	3	1/8	1/4	1.00	.88	1.50	1.50	.17	4.75	.70	.50	1.63	.15
M10-125-4W	4	1/8	1/4	1.00	.88	1.50	3.00	.17	6.25	.70	.50	1.63	.15
M10-125-5W	5	1/8	1/4	1.00	.88	1.50	4.50	.17	7.75	.70	.50	1.63	.15
M10-125-6W	6	1/8	1/4	1.00	.88	1.50	6.00	.17	9.25	.70	.50	1.63	.15
M10-125-7W	7	1/8	1/4	1.00	.88	1.50	7.50	.17	10.75	.70	.50	1.63	.15
M10-125-8W	8	1/8	1/4	1.00	.88	1.50	9.00	.17	12.25	.70	.50	1.63	.15
M10-125-9W	9	1/8	1/4	1.00	.88	1.50	1.50	.17	13.75	.70	.50	1.63	.15
M10-125-10W	10	1/8	1/4	1.00	.88	1.50	12.00	.17	15.25	.70	.50	1.63	.15

3/8 NPT (F) Input x 1/8 NPT (F) Output

Part Number	*	NPT A	B	C	D	E	F	G	H	J	K	M	R
M20-125-2W	2	1/8	3/8	1.25	.88	1.50	N/A	.20	3.25	.89	.63	1.63	.18
M20-125-3W	3	1/8	3/8	1.25	.88	1.50	1.50	.20	4.75	.89	.63	1.63	.18
M20-125-4W	4	1/8	3/8	1.25	.88	1.50	3.00	.20	6.25	.89	.63	1.63	.18
M20-125-5W	5	1/8	3/8	1.25	.88	1.50	4.50	.20	7.75	.89	.63	1.63	.18
M20-125-6W	6	1/8	3/8	1.25	.88	1.50	6.00	.20	9.25	.89	.63	1.63	.18
M20-125-7W	7	1/8	3/8	1.25	.88	1.50	7.50	.20	10.75	.89	.63	1.63	.18
M20-125-8W	8	1/8	3/8	1.25	.88	1.50	9.00	.20	12.25	.89	.63	1.63	.18
M20-125-9W	9	1/8	3/8	1.25	.88	1.50	1.50	.20	13.75	.89	.63	1.63	.18
M20-125-10W	10	1/8	3/8	1.25	.88	1.50	12.00	.20	15.25	.89	.63	1.63	.18

ISO 9001:2008 certification demonstrates Pneumadyne's commitment to quality -Received in 2004-

* Number of stations

- Measurements in inches

- When design makes a dimension critical- contact factory for confirmation. All dimensions shown subject to change without notice.

Product Information *Inline Manifolds-1.5" Spacing*

3/8 NPT (F) Input x 1/4 NPT (F) Output

Part Number	*	NPT A	B	C	D	E	F	G	H	J	K	M	R
M20-250-2W	2	1/4	3/8	1.25	.88	1.50	N/A	.20	3.25	.89	.63	1.63	.18
M20-250-3W	3	1/4	3/8	1.25	.88	1.50	1.50	.20	4.75	.89	.63	1.63	.18
M20-250-4W	4	1/4	3/8	1.25	.88	1.50	3.00	.20	6.25	.89	.63	1.63	.18
M20-250-5W	5	1/4	3/8	1.25	.88	1.50	4.50	.20	7.75	.89	.63	1.63	.18
M20-250-6W	6	1/4	3/8	1.25	.88	1.50	6.00	.20	9.25	.89	.63	1.63	.18
M20-250-7W	7	1/4	3/8	1.25	.88	1.50	7.50	.20	10.75	.89	.63	1.63	.18
M20-250-8W	8	1/4	3/8	1.25	.88	1.50	9.00	.20	12.25	.89	.63	1.63	.18
M20-250-9W	9	1/4	3/8	1.25	.88	1.50	1.50	.20	13.75	.89	.63	1.63	.18
M20-250-10W	10	1/4	3/8	1.25	.88	1.50	12.00	.20	15.25	.89	.63	1.63	.18

1/2 NPT (F) Input x 1/4 NPT (F) Output

Part Number	*	NPT A	B	C	D	E	F	G	H	J	K	M	R
M30-250-2W	2	1/4	1/2	1.50	.88	1.50	N/A	.20	3.25	1.12	.75	1.63	.19
M30-250-3W	3	1/4	1/2	1.50	.88	1.50	1.50	.20	4.75	1.12	.75	1.63	.19
M30-250-4W	4	1/4	1/2	1.50	.88	1.50	3.00	.20	6.25	1.12	.75	1.63	.19
M30-250-5W	5	1/4	1/2	1.50	.88	1.50	4.50	.20	7.75	1.12	.75	1.63	.19
M30-250-6W	6	1/4	1/2	1.50	.88	1.50	6.00	.20	9.25	1.12	.75	1.63	.19
M30-250-7W	7	1/4	1/2	1.50	.88	1.50	7.50	.20	10.75	1.12	.75	1.63	.19
M30-250-8W	8	1/4	1/2	1.50	.88	1.50	9.00	.20	12.25	1.12	.75	1.63	.19
M30-250-9W	9	1/4	1/2	1.50	.88	1.50	1.50	.20	13.75	1.12	.75	1.63	.19
M30-250-10W	10	1/4	1/2	1.50	.88	1.50	12.00	.20	15.25	1.12	.75	1.63	.19

1/2 NPT (F) Input x 3/8 NPT (F) Output

Part Number	*	NPT A	B	C	D	E	F	G	H	J	K	M	R
M30-375-2W	2	3/8	1/2	1.50	.88	1.50	N/A	.20	3.25	1.12	.75	1.63	.19
M30-375-3W	3	3/8	1/2	1.50	.88	1.50	1.50	.20	4.75	1.12	.75	1.63	.19
M30-375-4W	4	3/8	1/2	1.50	.88	1.50	3.00	.20	6.25	1.12	.75	1.63	.19
M30-375-5W	5	3/8	1/2	1.50	.88	1.50	4.50	.20	7.75	1.12	.75	1.63	.19
M30-375-6W	6	3/8	1/2	1.50	.88	1.50	6.00	.20	9.25	1.12	.75	1.63	.19
M30-375-7W	7	3/8	1/2	1.50	.88	1.50	7.50	.20	10.75	1.12	.75	1.63	.19
M30-375-8W	8	3/8	1/2	1.50	.88	1.50	9.00	.20	12.25	1.12	.75	1.63	.19
M30-375-9W	9	3/8	1/2	1.50	.88	1.50	1.50	.20	13.75	1.12	.75	1.63	.19
M30-375-10W	10	3/8	1/2	1.50	.88	1.50	12.00	.20	15.25	1.12	.75	1.63	.19

1/2 NPT (F) input porting available to allow for greater flow

Over 30 colors of anodic coatings are available

* Number of stations

- Measurements in inches