PLQ2 SERIES CONNECTOR



The PLQ2 Series provides ultra-reliable, dripless connections and disconnections that protect valuable electronics. Designed using a high-performance thermoplastic, the PLQ2 connector is lightweight, chemical resistant, rated UL94 V-0 flame retardant and easy to use—a perfect choice for liquid cooling of electronics applications. These innovative connectors offer a high-flow capacity to optimize thermal management system performance. The PLQ2 Series uses CPC-developed valve technology that eliminates drips and is designed to withstand long-term use.

FEATURES	BENEFITS
High-performance thermoplastic material	Lightweight, durable and chemically compatible with widely used liquid cooling fluids
Designed specifically for liquid cooling applications	Withstands continuous exposure to moisture with no risk of corrosion
Low pressure drop	Increases the efficiency of liquid cooling systems
Robust product testing to ensure reliability	Proven dimensional stability, chemical compatibility and product tested to 10,000 cycles

Visit us at cpcworldwide.com or call 800-444-2747 to get a free catalog or to find your local distributor.

Specifications • • •



PRESSURE:

Vacuum to 120 psi, 8.3 bar

TEMPERATURE:

0°F to 240°F (-17°C to 115°C)

MATERIALS:

Main Components: Polyphenylsulfone PPSU

Valves and Thumb latch: PPSU Valve Springs (wetted): Stainless steel External springs and pin: Stainless steel

Seals: EPDM Seal Spacer: PTFE

COLOR: Matte Black with Cool Blue or

Warm Red

TUBING SIZES:

1/4" ID (6.4mm ID)

LUBRICANTS: Krytox® PFPE


SPILLAGE:


< 0.015 cc per disconnect at 0 psi

< 0.063 cc per disconnect rated at 200 psi

INCLUSION: <0.063 cc per connect

WARNING: Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of CPC's products in their own application conditions.






These graphs are intended to give you a general idea of the performance capabilities of each product line. Contact CPC for flow of a particular coupling combination


PLQ2 SERIES DIMENSIONS


A = Height/Diameter


B = Total Length

D = Elbow Radial Length










Coupling Bodies • POLYPHENYLSULFONE PPSU



Coupling Inserts • POLYPHENYLSULFONE PPSU

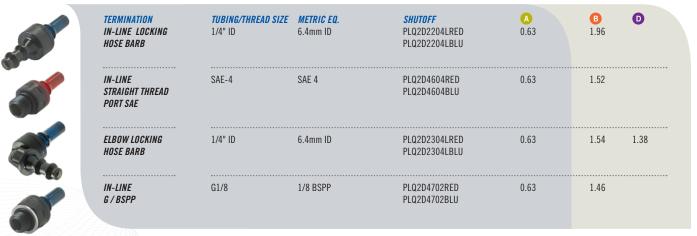

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters.



COLDER PRODUCTS COMPANY

PHONE +1 651-645-0091 FAX +1 651-645-5404 TOLL FREE 800-444-2474 COLDER PRODUCTS COMPANY GMBH
Germany

PHONE +49-6026-9973-0 FAX +49-6026-9973-173 COLDER PRODUCTS COMPANY LIMITED
Hong Kong

PHONE +852-2987-5272 FAX +852-2987-2509

Smart fluid handling to take you forward, faster.

cpcworldwide.com/ContactUs

WARRANTY: All sales are subject to Colder Products Company's limited express warranty set forth in the CPC catalog. Contact your local distributor or CPC Customer Service for warranty provisions. Warning: Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of CPC. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.